Wireless Lacrosse Shot Clock

Quick Start Guide

QUICK START GUIDE

Lacrosse Shot Clock

1 Turning On the Display

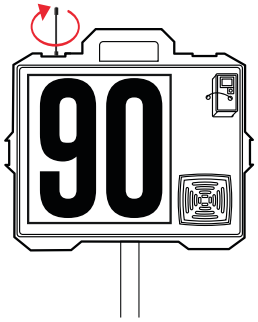

A Before powering on the displays, screw the antenna into the top of the primary display.

Note: Only the primary display has an antenna connector.

Additional Note: The antenna is located on the front face of the primary display, secured between two brackets.

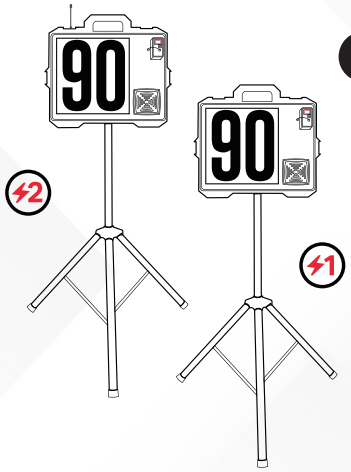

B Turn on the battery to power the displays. Start by powering on the secondary display, followed by the primary display.

Note: The secondary display must be turned on first so the primary can sync to its signal.

2 Using the Wireless Remote Control

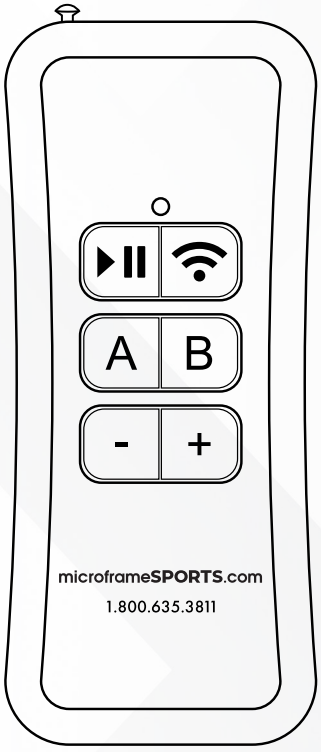

Remote Functions

Play/Pause: Starts or stops the timer countdown.

Sync: Establishes a wireless connection between the remote and the shot clock(s). Hold the sync button to pair the remote with the clock(s).

A/B: Set time presets. To create a preset, hold down the desired button (A or B) while the clock is set to the desired time.

+/-: Add or subtract seconds from the clock.

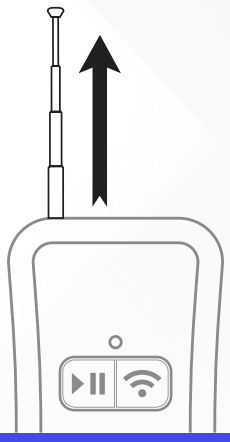

Note: If the remote isn't connecting, extend the antenna for improved signal range.

QUICK START GUIDE

Lacrosse Shot Clock

Connecting with the Wired Button Box

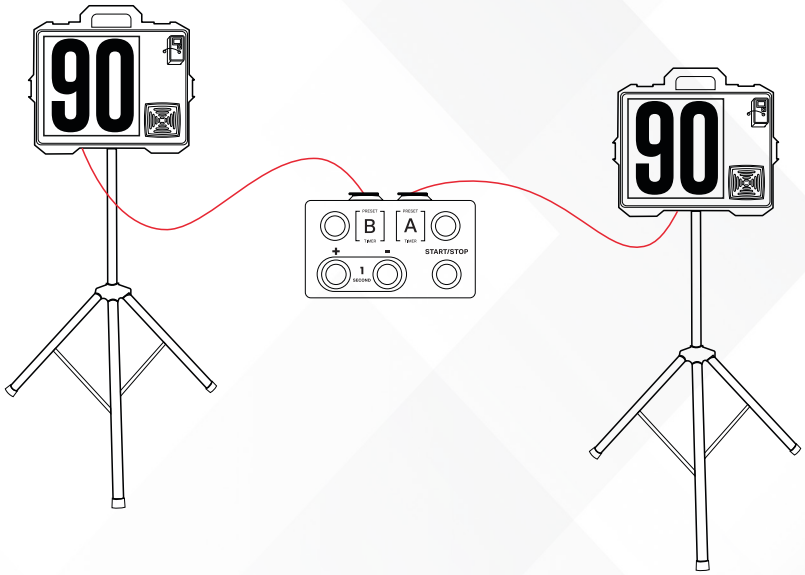

A Connect the primary cable to the primary primary port on the primary display and the secondary cable to the secondary port on the secondary display.

Note: The primary display has two external antenna connectors.

Using the Button Box

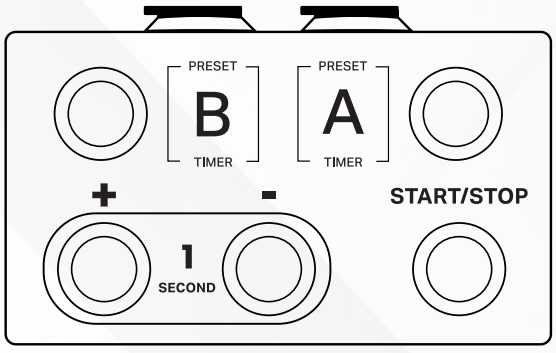

Button Box Functions

Start/Stop: Starts or stops the timer countdown.

A/B: Set time presets. To create a preset, hold down the desired button (A or B) while the clock is set to the desired time.

+/-: Add or subtract seconds from the clock.